


ESLINGAS DE CABLE DE ACERO

6x19+1 / 6x37+1 CON CASQUILLO COEFICIENTE DE SEGURIDAD 5:1

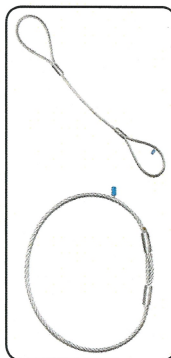


CARGA MÁXIMA DE UTILIZACIÓN

	1 RAMAL		2 RAMALES		3-4 RAMALES	
Factor	1	1,4	1	2,1	1,5	
β	0°	0° <> 45°	45° <> 60°	0° <> 45°	45° <> 60°	
\emptyset mm						
8	640	890	640	1.340	960	
10	1.000	1.400	1.000	2.100	1.500	
12	1.380	1.930	1.380	2.890	2.070	
14	1.880	2.630	1.880	3.940	3.670	
16	2.450	3.430	2.450	5.140	3.670	
18	3.110	4.350	3.110	6.530	4.660	
20	3.830	5.360	3.830	8.040	5.740	
22	4.640	6.490	4.640	9.740	6.960	
24	5.520	7.720	5.520	11.590	8.280	
26	6.480	9.070	6.480	13.600	9.720	
28	7.510	10.510	7.510	15.770	11.260	
30	8.500	11.900	8.500	17.850	12.750	
32	9.800	13.720	9.800	20.580	14.700	
34	11.100	15.540	11.100	23.310	16.650	
36	12.400	17.360	12.400	26.040	18.600	
40	15.300	21.420	15.300	32.130	22.950	

CÁLCULOS SEGÚN NORMA EN 13414-1

CABLES DE ACERO



\emptyset mm	Carga rotura mínima 180 kg/mm ²		
2	239		
3	538	498	
4	957	885	
5	1.500	1.380	
6	2.150	1.990	
7		2.710	
8		3.540	3.400
9		4.480	4.300
10		5.530	5.310
11		6.690	6.420
12		7.970	7.640
14		10.800	10.400
16		14.200	13.600
18		17.900	17.200
20		22.100	21.200
22			25.700
24			30.600
26			35.900
28			41.600
30			48.000
32			54.300
36			68.800
38			76.800
40			84.900

Disponible en estos colores

	Cristal	
	Blanco	
	Rojo	
	Negro	
	Azul	



COMERCIAL INDUSTRIAL SISTRYES, S.L.

Cobalto, nº152, Planta 2ª Puerta G,
08907 HOSPITALET DE LLOBREGAT (BCN)
Telf. 34 93 6551515 - sistryes@sistryes.com